section bending machines





ABOUT US

AMOB S.A. provides one of the biggest ranges of specialised equipment for the tube and pipe bending industry worldwide.

Founded in 1960 by António Martins Oliveira Barros (AMOB) and followed by his two sons Luis and Manuel, we have progressively become the world's leading manufacturer of metalworking technologies.

We serve the global market with exceptional machinery and tooling for tube and pipe bending, section bending and swaging purposes – ranging from simple, manual appliances to complex, fully electric CNC powered systems.

AMOB designs, develops, retails and services a variety of products for a range of leading industrial industries including automobile and shipping, aeronautics and construction amongst others.





MANUFACTURING

AMOB has a proud history of manufacturing in Portugal, employing over 140 staff members at our main plant in Porto. Our recently-renewed headquarters covers 18000m², and is equipped with the highest technological production equipment including CNC machining centres, lathes and milling machines, as well as sheet metal cutting and bending machinery for guaranteed high fabrication standards. Elsewhere, AMOB has commercial facilities in Russia, Brazil, Spain, Benelux, France and a worldwide network of over 70 agencies and technical centers – providing customer support wherever you are!







TECHNICAL

Our products are designed in our technical department by a team of highly-skilled engineers - we offer competitive solutions without compromising on quality.

Over the years, AMOB has grown with our customers' requirements and the market demand. We're just as passionate about growing and developing our products as we are about our client relationships.









We thank you for choosing AMOB!

MAM Manual profile benders MAH Hydraulic profile benders MAH-RIA Hydraulic profile benders MAH-CNC **CNC profile** benders MAH-AC **Angle** bending rolls MAH-AC Heavy Duty **Section** bending rolls MAH-AC Heavy Duty

P18 - 19

|2

Section bending rolls

Section bending rolls

MAH-AC Heavy Duty

MAM

Manual profile benders



AMOB's MAM series of manual top roll profile bending machines are an entry level to the biggest range of section benders in the world. They are extremely user-friendly and the most economical way of roll bending a wide variety of different profiles. The top roll position is manually adjusted with a linear scale for repeatability. There are also locking nuts to secure the top roll position to ensure repeatability in single pass production runs. The MAM series features both two and three driven rolls to suit every application - the three driven roll machines suit tighter radiuses and minimise material marking. The MAM series' simplicity and reliability ensures that anyone from apprentices through to experienced workers will easily maximise the capabilities of these machines. Both horizontal and vertical working positions ensure that even in the smallest work spaces an MAM series profile bender will have its place. The MAM series is a great, cost-effective way to get into the profile bending market.









MAM45/2 - MAM50/2

Standard specification

Two driven rolls

Standard rolls

Lateral guide rolls

Double speed motors

Horizontal & vertical working position

Foot pedal with safety device

Option specification

Special rolls for profile/tubes Angle bending guide rolls

MAM40/3

Standard specification

Three driven rolls

Standard rolls

Lateral guide rolls

Horizontal & vertical working position

Foot pedal with safety device

Option specification

Special rolls for profile/tubes Angle bending guide rolls



	MAM45/2 (all dimensions in mm)	MAM50/2 (all dimensions in mm)	MAM40/3 (all dimensions in mm)
1	50x10 Ø800	60x10 Ø900	60x10 Ø800
	80x15Ø700	80x15 Ø700	80x15 Ø600
3	35x35 Ø1400	35x35 Ø1000	35x35 Ø800
	Ø30 Ø700	Ø35 Ø900	Ø35 Ø700
• 0 0	Ø50x2 Ø800	Ø60x2 Ø1100	Ø60x2 Ø1000
. 6 0	Ø33,7 x2,6 Ø900	Ø48,3x2,9 Ø1000	Ø60,3x2,9 Ø1000
7	50x30x3	50x40x3	60x30x3
	40x40x3	40x40x3	45x45x3
.4/1	40x40x5 Ø400	50x50x5 Ø800	50x50x5 Ø600
	40x40x5 Ø500	50x50x5 Ø950	50x50x5 Ø700
11 -	50x5 Ø800	50x5 Ø700	60x5- Ø700
12	50x5 Ø950	50x5 Ø900	60x5 Ø900
13	50x5 Ø950	50x5 Ø900	60x5 Ø900
	UPN 50 Ø400	UPN 60 Ø900	UPN 60 Ø800
	UPN 50 Ø500	UPN 60 Ø1300	UPN 60 Ø1200
	-	-	-
	-	-	-
	-	-	-
. H	-	-	-
. H H	-	-	-

lechnical specifications				
Section mod.	10	16	16	
Power	1,1kW - 1,5hp	1,1kW - 1,5hp	2,2kW-3hp	
RPM	10,6/21,2	13,6/27,2	12	
Tool Ø	149-79/118-59	146/98	146/98	
Shaft Ø	30/30	50/50	45/45	
Weight (Kg)	250	290	450	
Dimensions (mm)	660x760x1420	950x730x1420	1220x640x1440	

- Standard rolls
- One set of rolls is required for each tube OD
- Special rolls for thin wall profiles
- Special ro

Data achieved using special tooling, 240N/mm2 yeld point steel and several bending operation

MAH

Hydraulic profile benders



AMOB's MAH series of hydraulic top roll profile bending machines are the backbone of the biggest selection of roll benders in the world. Extremely user-friendly, again they are completely accessible for apprentices and experienced operatives alike. The top roll position is displayed on the DRO, based within the free standing operator control unit. The MAH series is perfect for those applications that require multiple passes, where repeatability is key. Available in two and three driven roll these machines can cater for the largest range of profiles in the market place. The three driven roll machines suit tighter radiuses and minimise material marking. Both horizontal and vertical working positions ensure that even in the smallest work spaces an MAH series profile bender will have its place. The MAH series is a perfect compromise between capacity, repeatability, ease of use and reduction in production cycle times.











MAH50/2

Standard specification

Two driven rolls

Standard rolls

Lateral guide rolls

Double speed motors

Horizontal & vertical working position

Top roll programmable digital read-out

Foot pedal with safety device

Option specification

Special rolls for profile/tubes Angle bending guide rolls

MAH40/3 - MAH60/3

Standard specification

Three driven rolls

Standard rolls

Lateral guide rolls

Horizontal & vertical working position

Top roll programmable digital read-out

Foot pedal with safety device

Option specification

Digital length measurement system Special rolls for profile/tubes Angle bending guide rolls

MAH60/3

Top roll programmable digital read-out



	MAH50/2 (all dimensions in mm)	MAH40/3 (all dimensions in mm)	MAH60/3 (all dimensions in mm)
	60x10 Ø900	60x10 Ø800	70x12 Ø1800
	80x15 Ø700	80x15 Ø600	70x20 Ø1000
	35x35 Ø1000	35x35 Ø800	45x45 Ø1000
	Ø35 Ø900	Ø35 Ø700	Ø45 Ø1000
5	Ø60x2 Ø1100	Ø60x2 Ø1000	Ø70x3 Ø3000
60	Ø48,3x2,9 Ø1000	Ø60,3x2,9 Ø1000	Ø76,1x3,2 Ø2500
	50x40x3	60x30x3	70x30x3
	40x40x3	45x45x3	50x50x3
ل ك.	50x50x5 Ø800	50x50x5 Ø600	50x50x5 Ø700
	50x50x5 Ø950	50x50x5 Ø700	50x50x5 Ø700
- 4	50x5 Ø700	60x5 Ø700	70x5 Ø700
	50x5 Ø900	60x5 Ø900	70x5 Ø900
	50x5 Ø900	60x5 Ø900	70x5 Ø900
	UPN 60 Ø900	UPN 60 Ø800	UPN 80 Ø1200
	UPN 60 Ø1300	UPN 60 Ø1200	UPN 80 Ø1200
I	-	-	_
	-	-	_
	-	-	-
• H	-	-	-
. H H	-	-	F

lechnical specifications					
Section mod.	16	16	20		
Power	2,6kW - 3,5hp	3,7kW - 5hp	5,5kW - 7hp		
RPM	13,6/27,2	12	11		
Tool Ø	146/98	146/98	170/108		
Shaft Ø	50/50	45/45	55/55		
Weight (Kg)	330	490	600		
Dimensions (mm)	940x750x1400	1200x770x1400	1300x890x1550		

- Standard rolls
- One set of rolls is required for each tube OD
- Special rolls for thin wall profiles

MAH-RIA

Hydraulic profile benders










AMOB's MAH-RIA series of hydraulic top roll profile bending machines with adjustable bottom rolls are the next step up. The adjustable bottom rolls allow both a tight radius with reduced capacity and a large radius with increased capacity – the best of both worlds. Plus, by adjusting the position of the bottom rolls you can reduce deformation along with reduced flats, and therefore waste. These additional features remain extremely user-friendly, and we'd recommend these machines for use by both apprentices and experienced operatives alike. The top roll position is displayed on the DRO, based within the free standing operator control unit. The MAH series is perfect for those applications that require multiple passes, where repeatability is key. Available in three driven rolls, these machines can cater for the largest range of profiles in the market place - again, the three driven roll machines suit tighter radiuses and minimise material marking. Both horizontal and vertical working positions ensure that even in the smallest work spaces an MAH-RIA series profile bender will have its place. The MAH-RIA series is the perfect compromise between capacity, repeatability, ease of use and reduction in production cycle times.

MAH80/3RIA Top roll programmable digital read-out Digital lengths measuring system Adjustment of lower rolls AM .B





MAH150/3RIA

Top roll programmable digital read-out Digital lengths measuring system Adjustment of lower rolls Angle bending guide rolls



MAH80/3 - MAH150/3

Standard specification

Three driven rolls

Standard rolls

Lateral guide rolls

Horizontal & vertical working position

Top roll programmable digital read-out

Digital length measurement system

Adjustment of lower rolls

Foot pedal with safety device

Option specification

Special rolls for profile/tubes Angle bending guide rolls

MAH80/3RIA MAH120/3RIA MAH150/3RIA

•		80x12 Ø2000	100x20 Ø2000	120x20 Ø1600
•	² /	100x20 Ø1000	120x30 Ø1100	160x40 Ø1200
•	3	50x50 Ø1000	55x55 Ø1100	65x65 Ø1500
•	•	Ø50 Ø800	Ø55 Ø1100	Ø70 Ø1500
•	5	Ø100x2 Ø1800	Ø120x2,5 Ø2000	Ø150x3 Ø2600
•	60	Ø88,9x3,6 Ø1700	Ø114,3 x3,6 Ø1400	Ø139,7x5 Ø2600
•		100x40x6	120x60x4	140x70x5
•		80x80x4	100x100x4	100x100x6
•	٦	60x60x6 Ø1000	70x70x10 Ø1500	80x80x12 Ø1500
•		60x60x6 Ø1000	70x70x10 Ø1500	80x80x12 Ø1500
•	14/4	80x6 Ø1000	100x10 Ø1400	120x12 Ø1400
•	12	80x5 Ø1200	100x10 Ø1400	120x10 Ø1400
•	13	80x5 Ø1000	100x10 Ø1200	120x12 Ø1600
•		UPN100 Ø1000	UPN 120 Ø1200	UPN 140 Ø1400
•	15	UPN 100 Ø1200	UPN 120 Ø1200	UPN140 Ø1400
•	I I	IPN 80 Ø1200	IPN 120 Ø1100	IPN 140 Ø1500
•		-	-	HEA 100 Ø2000
•		-	-	-
•	19	-	-	-
•	20 H	-	-	-

Technical specifications					
Section mod.	25	45	60		
Power	5,5kW - 7hp	7,5kW - 10hp	10kW -13,5 hp		
RPM	10		6		
Tool Ø	187/118	247/138	300/188		
Shaft Ø	65/65	80/80	100/100		
Weight (Kg)	770	1480	2150		
Dimensions (mm)	1520x1080x1650	1615x1260x1760	1900x1400x1850		

- One set of rolls is required for each tube OD
- Special rolls for thin wall profiles

8 9

MAH-CNC

CNC profile benders







The MAH-CNC range from AMOB provides outstanding production cycle times, un-matched reliability and the production of products not possible on lower level machines. These are the first machines in AMOB's profile section range that are fully computer-controlled. This technology allows for producing elliptical shapes on a large scale with unbeatable repeatability - plus, the MAH-CNC range is able to put multiple radiuses into a single profile using both progressive and direct pressure, opening up a new sector for product manufacture. The user-friendly 2D CNC controls make this series a popular choice for profile bending sub-contractors and aluminium window and door producers, along with greenhouse manufacturers and other similar industries. The MAH CNC series takes profile bending to the next level and allows the production of products that is just not possible on MAH and MAM series machines.









MAH-CNC controller

HMI wide touch screen Simultaneous axis movements (reduced cycle time) High capacity program storage Profile name and calibration archive Multi radius bends Manual and fully automatic working cycle Produced parts counter Popup alarm messages Userfriendly data insert system

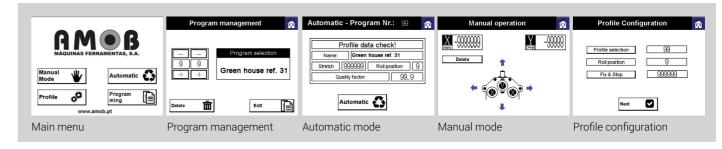













MAH-AC









The MAH-AC series carries the largest capacity profile bending machines in the world. With planetary moving bottom rolls, they can achieve faster, tighter bending with fewer passes, which results in reduced cycle times. This range is available in both CNC and NC with AMOB's specially developed auto learning software, which removes the need to do sacrificial test bends and therefore reduces scrap material and wasted production time.

If bending the largest profiles is a requirement then look no further than the MAH-AC series from AMOB.

MAH120/3AC Bottom rolls programable digital read-out Lateral guide rolls Electronic overload protection AM .B

MAH150/3AC

Bottom rolls programable digital read-out Hydraulic angle bending guide rolls Electronic overload protection













MAH60/3AC - MAH150/3AC Standard specification

Three driven rolls

Standard rolls

Horizontal & vertical working position

Foot pedal with safety device

Bottom rolls programable digital read-out Hydraulic adjustment of bottom rolls

Electronic overload protection

Lateral guide rolls (MAH60/3AC - MAH120/3AC)

Hydraulic standard guide rolls (MAH150/3AC)

Hydraulic angle bending guide rolls (MAH150/3AC) Option specification

Special rolls for profile/tubes

Hydraulic guide rolls


Mechanical or hydraulic angle guide rolls

Guide rolls digital read out

Variable speed

Pulling arm device

Pulling arm device tools

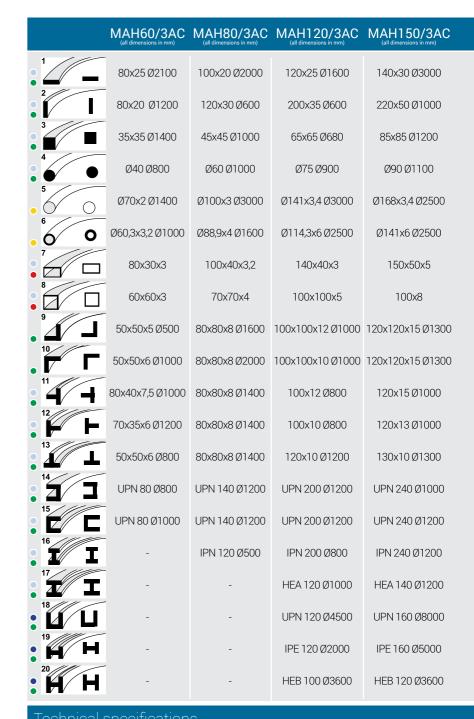

rechnicai	rechnical specifications				
Section mod.	28	35	40-80	80-150	
Power	5,5kW - 7hp	7kW - 9hp	11kW-15hp	15kw - 20 hp	
RPM	11,5	5,5	5,5	3,6	
Tool Ø	178	245	315	390	
Shaft Ø	65/65	80/80	100/100	120/120	
Weight (Kg)	1200	1660	2800	5300	
Dimensions	1280x1170x1445	1410x1380x1615	1435x1470x1760	2000x1815x2070	

- Special rolls for thin wall profiles

Section bending rolls







The MAH-AC 170-300 range of heavy-duty section bending machines caters for high end, heavy duty profile and section bending. With capabilities for bending up to IPE 270 beam, they are extremely heavy-duty and can cater for a huge range of profiles and sections. Like all machines from the MAH-AC range, these are the first products from AMOB to feature planetary moving bottom rolls - allowing for faster and tighter bending and a more efficient production time. This range is available in both CNC and NC with AMOB's specially developed auto learning software, which removes the need to do sacrificial test bends and therefore reduces scrap material and wasted production time. The MAH-AC series is the largest capacity range in the world - look no further than this range for bending the largest profiles.

MAH170/3AC Electronic overload protection Hydraulic angle bending guide rolls Pulling arm device

MAH170/3AC - MAH300/3AC Standard specification

Three driven rolls

Standard rolls

Hydraulic standard guide rolls

Horizontal working position

Bottom rolls programable digital read-out

Command with safety device

Hydraulic adjustment of bottom rolls

Electronic overload protection

Hydraulic angle bending guide rolls

Option specification

Special rolls for profile/tubes Guide rolls digital read out

Variable speed

Pulling arm device

Pulling arm device rolls













		MAH170/3AC	MAH250/3AC	MAH300/3A0
•	1	150x40 Ø1400	180x60 Ø1600	200x60 Ø1600
•	2	250x60 Ø1400	340x80 Ø1400	420x90 Ø1900
•	3	105x105Ø1600	130x130 Ø1700	150x150 Ø2200
•	•	Ø110 Ø1200	Ø140 Ø1200	Ø160 Ø1500
•	5	Ø219x2,7 Ø3000	Ø298x4,2 Ø5000	Ø368x4,5 Ø10000
•	60	Ø168,3 x7,1 Ø2500	Ø254 x8 Ø3500	Ø339,7x8 Ø15000
•		180x70x8	210x90x8	240x110x10
•		120x120x10	160x160x10	200x200x12
•		150x150x16Ø1200	160x160x20 Ø1600	200x200x28 Ø250
•		150x150x15Ø1500	150x150x20 Ø1600	200x200x25 Ø250
•	14/4	150x16Ø1000	160x20 Ø1400	200x28 Ø2500
•	12	150x15Ø1200	150x20 Ø2000	200x25 Ø2000
•	13	150x16Ø1000	160x20 Ø1500	200x28 Ø2500
•		UPN 300 Ø1100	UPN 360 Ø1200	UPN 450 Ø2000
•		UPN 300 Ø1100	UPN 360 Ø1400	UPN 450 Ø2000
•		IPN 300 Ø1200	IPN 360 Ø1500	IPN 450 Ø2000
•		HEA 180 Ø1100	HEA 260 Ø2500	HEA 400 Ø4500
•		UPN 180 Ø8000	UPN 240 Ø12000	UPN 260 Ø12000
•	19 H H	IPE 180 Ø6000	IPE 240 Ø7000	IPE 270 Ø10000
•	H H	HEA160 Ø6000	HEB 200 Ø8000	HEB 240 Ø10000

Technical specifications					
Section mod.	120-220	240-570	350-940		
Power	22kW - 30hp	29kW - 40 hp	41kW-55hp		
RPM	0 - 4,8	0-4	0 - 3,3		
Tool Ø	460	550	660		
Shaft Ø	190/170	250/230	290/270		
Weight (Kg)	9850	17000	21000		
Dimensions	2700x2080x1880	3050x2240x2160	3890x2850x2300		

- Standard rolls
- One set of rolls is required for each tube OD
- Special rolls for thin wall profiles
- Special rolls

Pulling arm device

g arm device

Data achieved using special tooling, 240N/mm2 yeld point steel and several bending operations.

All data of the machines is not binding and may be subject to change without notice. Pictures are for demonstration purpose only.

MAH-AC **Section** bending rolls









The MAH-AC 400-600 range of section bending machines caters for high end and heavy-duty profile and section bending. Capable of bending up to IPE 550 beam, they are extremely heavy duty and can cater for a huge range of profiles and sections. Like all machines from the MAH-AC range, these are the first products from AMOB to feature planetary moving bottom rolls - allowing for faster and tighter bending and a more efficient production time. Again, this range is available in both CNC and NC with AMOB's specially developed auto learning software which removes the need to do sacrificial test bends and therefore reduces scrap material and wasted production time.

If you're looking to bend the largest profiles, then look no further than the MAH-AC series from AMOB.

MAH400/3AC

Electronic overload protection Hydraulic angle bending guide rolls Pulling arm device

MAH400/3AC - MAH600/3AC

Standard specification

Three driven rolls

Standard rolls

Hydraulic standard guide rolls

Horizontal working position

Bottom rolls programable digital read-out

Command with safety device

Hydraulic adjustment of bottom rolls

Electronic overload protection

Hydraulic angle bending guide rolls

Option specification

Pulling arm device rolls

Special rolls for profile/tubes Guide rolls digital read out Variable speed Pulling arm device







MAH600/3AC Electronic overload protection Hydraulic angle bending guide rolls

Pulling arm device





	MAH400/3AC	MAH500/3AC	MAH600/3AC
1	250x60 Ø2100	400x60 Ø3000	450x60 Ø3000
2	470x20 Ø1400	650x100 Ø2000	650x120 Ø1500
	160x160 Ø2200	240x240 Ø2500	280x280 Ø2500
	Ø180 Ø2000	Ø260 Ø2000	Ø300 Ø2000
. 0	Ø370x5,5 Ø12000	Ø558x5,5 Ø18000	Ø558x5,5 Ø18000
. 60	Ø368 x8 Ø15000	Ø508x15 Ø15500	Ø558x15 Ø15000
	250x125x12	320x150x12	420x200x12
	220x220x13	400x400x16	450x450x20
ل کُ	200x200x28 Ø2000	200x200x28 Ø1700	200x200x28Ø1600
	200x200x25 Ø2000	200x200x28 Ø2000	200x200x28Ø1800
: 4/4	200x28 Ø2000	200x28 Ø1500	200x28 Ø1300
- I	200x25 Ø1800	200x30 Ø2200	200x30 Ø1800
	200x28 Ø1800	200x28Ø1700	200x28 Ø1600
	UPN 500 Ø2000	UPN 1000 Ø4000	UPN 1000 Ø3500
	UPN 500 Ø2000	UPN 1000 Ø4000	UPN 1000 Ø3500
	IPN 500 Ø2000	IPN 1000 Ø5000	IPN 1000 Ø5000
	HEA 400 Ø3500	HEA 1000 Ø6000	HEA 1000 Ø5000
	UPN 280 Ø16000	UPN 400 Ø40000	UPN 400 Ø35000
• H	IPE 300 Ø11000	IPE 550 Ø20000	IPE 550 Ø18000
: H H	HEA280 Ø14000	HEB 500 Ø30000	HEA 550 Ø40000

Technical specifications				
Section mod.	350-1000	1000-4700	2000-5500	
Power	65kW - 88hp	75kW - 100hp	90kW - 120hp	
RPM	0-3	0 - 2,7	0 - 2,7	
Tool Ø	740	800	800	
Shaft Ø	310/290	370/370	370/370	
Weight (Kg)	27150	49500	62000	
Dimensions	4350x3350x2350	6620x4900x4150	6620x4900x4250	

- One set of rolls is required for each tube OD
- Special rolls for thin wall profiles

MAH-AC **Section** bending rolls











The MAH-AC 700-1000 range of section bending machines caters for high end, heavy-duty profile and section bending. Capable of bending up to IPE 1000 beam, they are the largest roll benders in the world in terms of capacity and size. Like all machines from the MAH-AC range, these are the first products from AMOB to feature planetary moving bottom rolls - allowing for faster and tighter bending and a more efficient production time. This range is available in both CNC and NC with AMOB's specially developed auto learning software, which removes the need to do sacrificial test bends and therefore reduces scrap material and wasted production time.

For bending the largest profiles, look no further than the MAH-AC series from AMOB.

MAH700/3AC - MAH1000/3AC Standard specification

Three driven rolls

Standard rolls

Hydraulic standard guide rolls

Horizontal working position

Bottom rolls programable digital read-out

Command with safety device

Hydraulic adjustment of bottom rolls

Electronic overload protection

Hydraulic angle bending guide rolls

Option specification

Special rolls for profile/tubes

Guide rolls digital read out


Variable speed

Pulling arm device

Pulling arm device rolls







	MAH700/3AC	MAH800/3AC	MAH1000/3AC
1	500x130 Ø4000	500x160 Ø3000	550x200 - Ø6400
	1000x150 Ø3800	1000x180 Ø3800	600x250 - Ø7000
3	310x310 Ø4000	350x350 Ø3000	400x400 - Ø6400
4	Ø380 Ø5000	Ø420 Ø3800	-
5	Ø660x8 Ø18000	Ø711x16 Ø38000	-
60	Ø610x18 Ø14000	Ø610x22 Ø19000	-
7	660x610x16	660x610x20	-
	508x508x20	600x600x20	-
	200x28 Ø3200	200x30 Ø1600	-
	200x28 Ø3200	200x30 Ø1800	-
1144	200x28 Ø3200	200x30 Ø1600	-
12	200x28 Ø3200	200x30 Ø1800	-
13 	200x28 Ø3200	200x30 Ø1600	-
	UPN 1000 Ø3500	UPN 1000 Ø3000	-
	UPN 1000 Ø3500	UPN 1000 Ø3000	-
I	IPE 1000 Ø3000	IPN 1000 Ø3000	-
	HEM 1000 Ø3000	HEM 1000 Ø3000	-
	UPN 700 Ø80000	UPN 800 Ø100000	UPN 1000 - Ø90000
19 H	IPE 800 Ø38000	IPE 1000 Ø55000	IPE 1000 - Ø49500
H H	HEA 800 Ø43000	HEB 800 - Ø55000	HEB 1000 - Ø55000
echnical s	specifications		
Section mod.	3500-7700	7000-11500	7000-15000
Power	110kW - 150hp	170kW - 230hp	240kW - 320hp
RPM	0-7	0-7	0-6

Technical specifications			
Section mod.	3500-7700	7000-11500	7000-15000
Power	110kW - 150hp	170kW - 230hp	240kW - 320hp
RPM	0-7	0-7	0-6
Tool Ø	840	940	1025/815
Shaft Ø	420/420	520/420	520/420
Weight (Kg)	75100	85250	195000
Dimensions	6900x5500x4300	7300x6000x4350	10000x8250x4550

- One set of rolls is required for each tube OD
- Special rolls for thin wall profiles







Head quarters

AMOB Portugal

Rua Padre Domingos J. Pereira 1249 4760 – 563 Louro - V.N. Famalicão Portugal Telf. 00 351 252 330 900 sales@amob.pt www.amob.pt

Delegations

AMOB España

Polg. Ind. Málpica-Alfindém, Calle Olmo, nº32 50171 La Puebla de Alfindém Zaragoza - España Tel. 0034 976 105 964

AMOB Russia

107023, Moscow, Shelkovskoe shosse, 100 Russian Federation Tel. 007 (495) 374 95 86

AMOB Brasil

Rod. Geraldo Scavone, 2300 – Galpão 34 12305-490 Jacarei – SP São Paulo - Brasil Tel. 0055 (12) 3958 4657

AMOB Benelux

Kantoor: Kloosterakker / 6602 HT Wijchen Nederland Tel. 0031 8870 80700

AMOB France

C.I.T. 59223 RONCQ France Tel. 0033 (0) 328 350 834